


"The Original" Got Even BETTER



OR12TF

TATTLE FLAG™ HD UPGRADE KIT
THIS KIT WILL UPGRADE 1 OR12 SIDE PLANER



...FLAG DOWN? ...FISH ON! ...

**The Tattle Flag™
HD System
was designed
for light
striking fish.**

"Often Imitated, Never Duplicated!"

OR12TF Contains:

2 OR16 Clips	1 Screw Eye	1 Split Ring	1 HD Wire
1 Spring	1 6/32 Screw	1 Flag	1 Washer

*(Unfold this sheet for Installation Instructions
and some Helpful Hints!)*





"Your Leader In Trolling Technology"

www.offshoretackle.com

MADE IN THE U.S.A.

INSTALLATION INSTRUCTIONS:

Please read each step **THOROUGHLY** before you attempt to put the parts on.

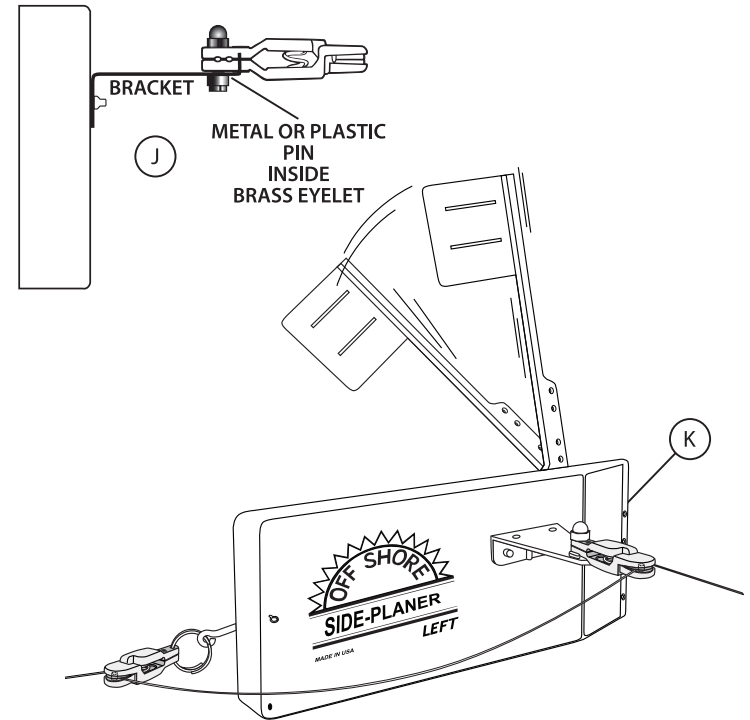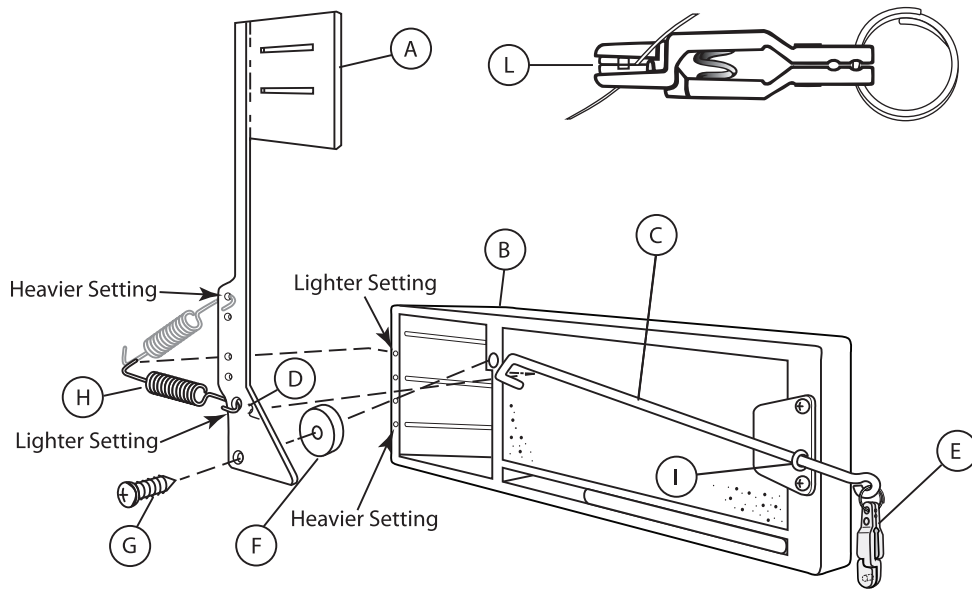


1. Remove the existing flag and releases from the board.
2. Install the screw eye (I) into the vacant hole located on the black tab. If you have an older board, you will need to drill a 1/16" hole yourself, drilling through the black tab and halfway through the back of the board.
3. Insert the HD wire (C) through the screw eye and put the hook end of the HD wire through the front hole in the flag (D) and use pliers to bend the end of the HD wire around the flag. **Note: The stem of the flag should be towards the nose of the board and the flag part should point towards the rear of the board.** The HD wire (C) should now be between the board (B) and the flag (A).
4. Place the washer (F) between the board (B) and the flag (A). With the 6/32 screw (G) attach the flag and washer to the board – **DO NOT OVER TIGHTEN THE SCREW, THIS WILL BIND THE FLAG AND IT WILL NOT WORK PROPERLY.** The flag must be able to move freely.
5. For the initial set up, have the flag standing straight up, place the round end of the spring (H) in the hole (as indicated) coming through the back of the flag. Depending on the type of lure you are using or the size of the fish you are going after, you can increase the tension of the spring further by moving the rounded end up the stem of the flag.
6. Place the angled end of the spring (H) into one of the predrilled holes in the nose of the board. The tension of the spring increases by moving the angled end of the spring down the nose of the board. If you have an older board, you can drill 1/16" holes along the nose as shown in (K). **Note: The spring may be able to come off of the board, be careful that you don't lose it.**
7. Attach one of the red OR16 (E) clips to the split ring provided and then attach the split ring through the loop on the HD wire (C) located at the tail of the board.
8. Attach the other red OR16 clip onto the bracket. Hand tighten the screw until the metal or plastic pin on the bracket is secured inside the brass eyelet on the red OR16 clip (J). **Note: Check tightness prior to setting the board out each time. You can purchase a lock nut to use in place of the nylon nut at your local hardware store or on our website if you prefer.**
9. With the upgrade flag kit properly installed, be sure to **always leave 3"- 4" of slack in the line between the two red OR16 clips. If no slack is present, the flag can't be pulled down.** Be sure to place the line behind the pin protruding through the center of the pads of each red OR16 clip (L) – this will insure that the clips will not be pulled off of the line.

Helpful Hints


Once the upgrade has been properly installed, now you can go to work at fine-tuning the spring tension for your speed, type of lure, and water conditions.

The best sensitivity is to adjust the spring so that the flag is at a 10 to 15 degree tilt.

Another tip would be to use the Super Line Loop (M) to keep the line from slipping when you attach it to the bracket or you can use an OR18 Snapper Release on the bracket.



UNFOLD THIS SHEET FOR INSTRUCTIONS!

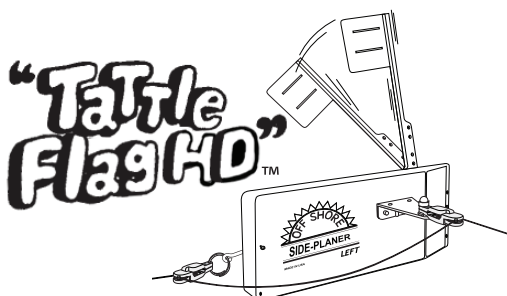

...FLAG DOWN? ...FISH ON! ...

This kit, when properly installed on our OR12 Side Planer, will give you a spring loaded flag that will be pulled down when a fish strikes the lure. With added spring adjustment holes on the stem of the flag in combination with the holes on the nose of the OR12 you can fine tune this set up even more allowing you to "read" the board even better and determine whether it is running correctly, fouled with weeds, or even if you are towing a small fish. This will allow more productive use of your time on the water!

The Tattle Flag™ HD System was designed for light striking fish.

www.offshoretackle.com

OR12TF

